



MC150M

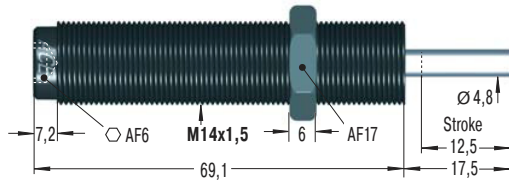

M14x1 also available to special order


Accessories, mounting, installation ... see pages 31 to 35.

PP150




Nylon Button
W₃ max = 14 Nm

RF14




Rectangular Flange

MB14




Clamp Mount

MC225M

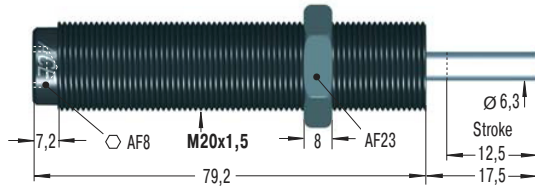


Accessories, mounting, installation ... see pages 31 to 35.

PP225




Nylon Button
W₃ max = 33 Nm

RF20




Rectangular Flange

MB20



Clamp Mount


MC600M

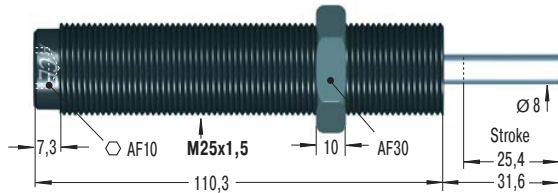

M27x3 also available to special order


Accessories, mounting, installation ... see pages 31 to 35.

PP600




Nylon Button
W₃ max = 68 Nm

RF25



Rectangular Flange

MB25



Clamp Mount

Capacity Chart

Type	Max. Energy Capacity		Effective Weight me		Min. Return Force N	Max. Return Force N	Rod Reset Time s	1 Max. Side Load Angle °	Weight kg
	W ₃ Nm/Cycle	W ₄ Nm/h	Self-Compensating me min. kg	me max. kg					
MC150M	20	34 000	0.9	10	3	5	0.4	4	0.06
MC150MH	20	34 000	8.6	86	3	5	0.4	4	0.06
MC150MH2	20	34 000	70	200	3	5	0.4	4	0.06
MC150MH3	20	34 000	181	408	3	5	1	4	0.06
MC225M	41	45 000	2.3	25	4	6	0.3	4	0.15
MC225MH	41	45 000	23	230	4	6	0.3	4	0.15
MC225MH2	41	45 000	180	910	4	6	0.3	4	0.15
MC225MH3	41	45 000	816	1 814	4	6	0.3	4	0.15
MC600M	136	68 000	9	136	5	9	0.6	2	0.26
MC600MH	136	68 000	113	1 130	5	9	0.6	2	0.26
MC600MH2	136	68 000	400	2 300	5	9	0.6	2	0.26
MC600MH3	136	68 000	2 177	4 536	5	9	0.6	2	0.26

¹ For applications with higher side load angles consider using the side load adaptor (BV) pages 30 to 34.