



### End Fitting

### Standard Dimensions


### End Fitting

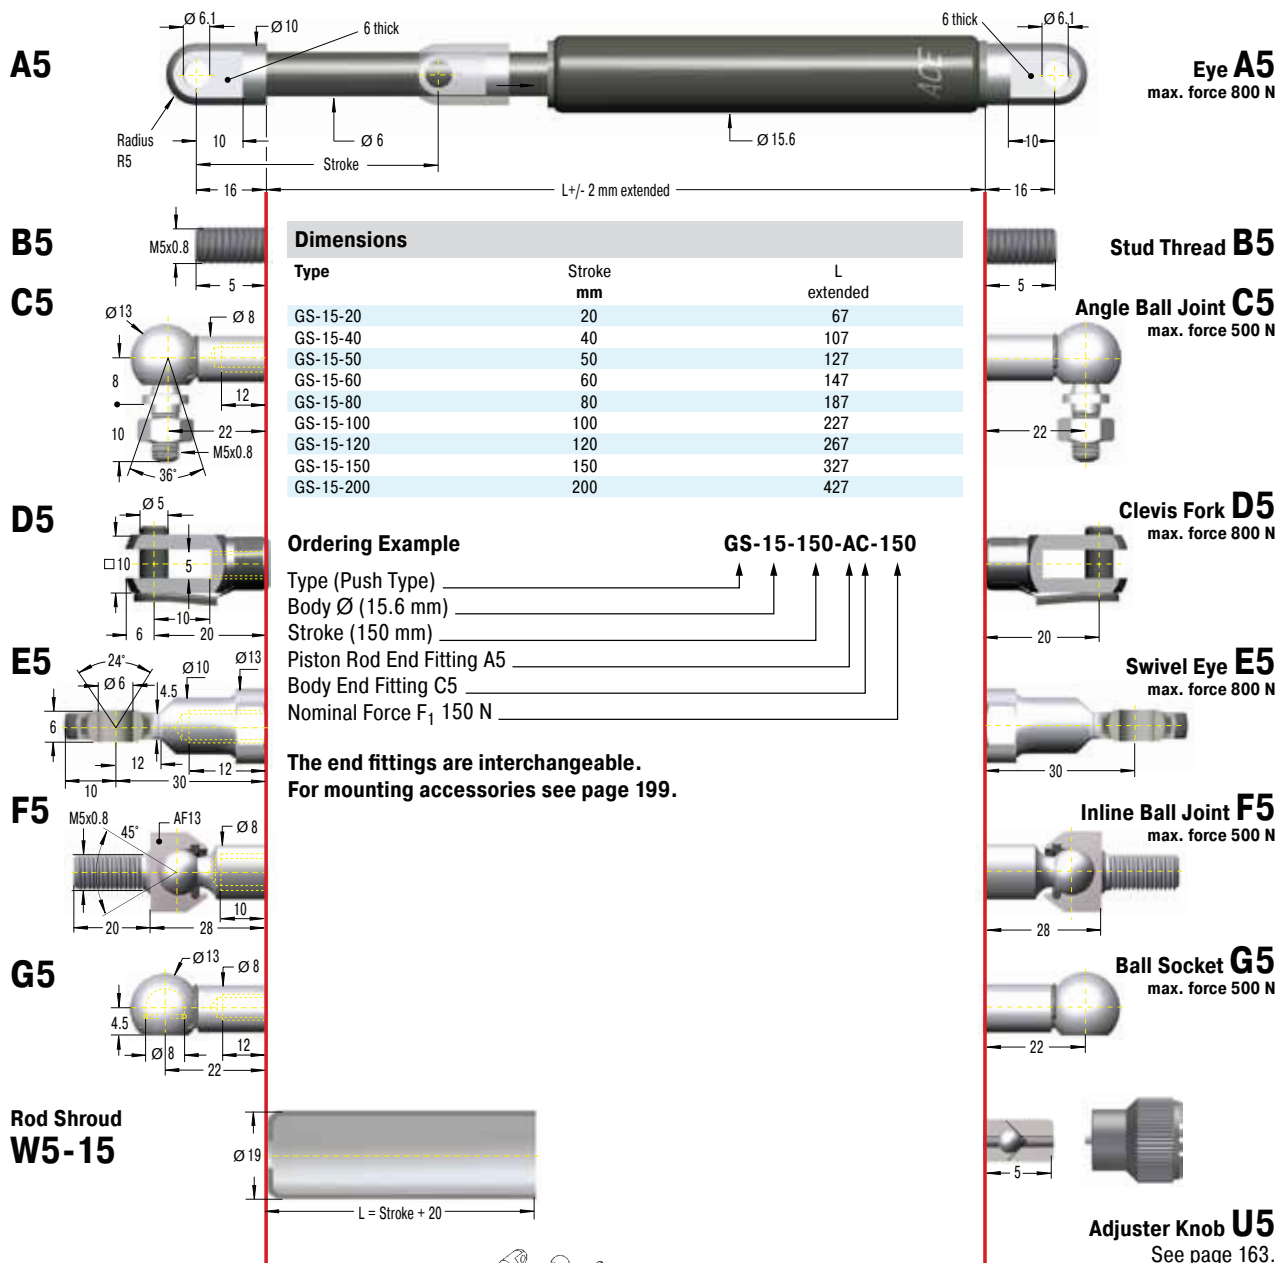

### Rod Shroud W5-15



### GS-15

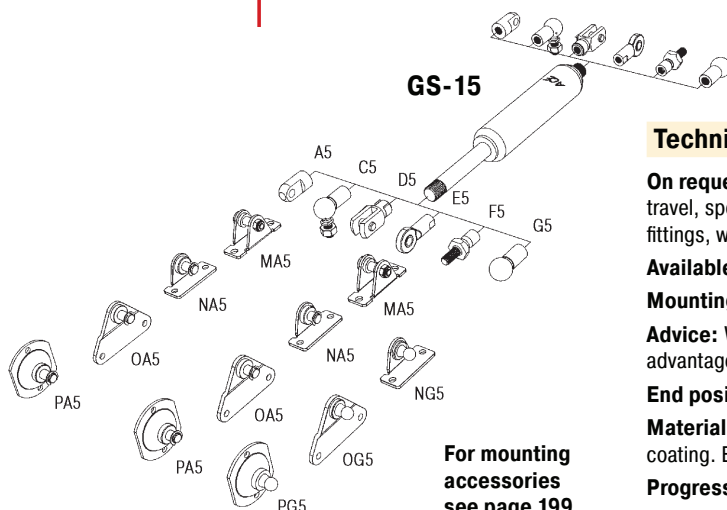

For mounting accessories see page 199.

### Technical Data

**On request:** Without damping, increased damping action at end of travel, special force curves, special lengths, strokes, alternative end fittings, wiper, stainless steel (see pages 179 to 186).

**Available force range F<sub>1</sub> at 20 °C:** 40 N to 400 N

**Mounting:** In any position

**Advice:** We recommend mounting with piston rod downwards to take advantage of the built-in end position damping.

**End position damping length:** Approx. 10 mm

**Material:** Body: Black coated steel. Piston rod: With wear-resistant coating. End fittings: Zinc plated steel.

**Progression:** Approx. 27%, F<sub>2</sub> max. 500 N