



SC190EUM

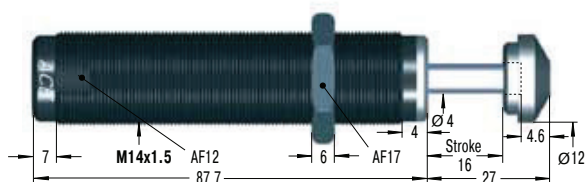


M14x1 and M16x1 also available to special order
Accessories, mounting, installation ... see pages 35 to 39.

SC300EUM

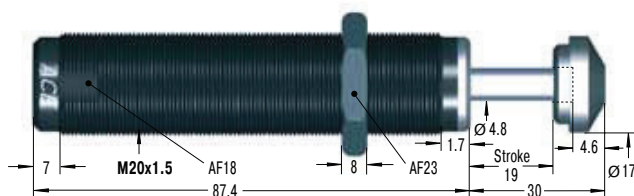


M22x1.5 also available to special order
Accessories, mounting, installation ... see pages 36 to 39.

SC650EUM

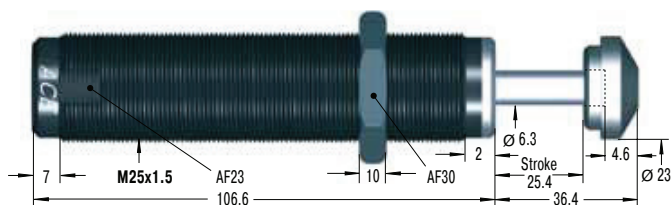

M26x1.5 also available to special order
Accessories, mounting, installation ... see pages 36 to 39.


SC925M

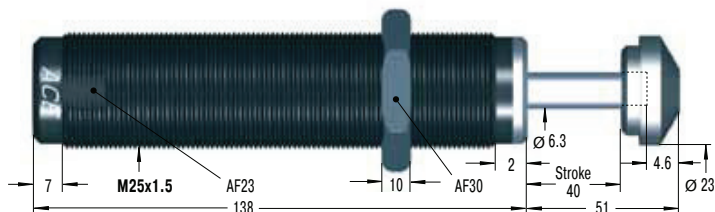

Accessories, mounting, installation ... see pages 36 to 39.


Available without rod end button on request.

RF14




Rectangular Flange

MB14




Clamp Mount

RF20




Rectangular Flange

MB20




Clamp Mount

RF25




Rectangular Flange

MB25




Clamp Mount

RF25



Rectangular Flange

MB25



Clamp Mount

Capacity Chart

	Max. Energy Capacity		Effective Weight me								
Type Part Number	W ₃ Nm/Cycle	W ₄ Nm/h	Soft-Contact		Self-Compensating		Min. Return Force N	Max. Return Force N	Rod Reset Time s	1 Max. Side Load Angle °	Weight kg
			me min. kg	me max. kg	me min. kg	me max. kg					
SC190EUM-0	25	34 000	—	—	0.7	4	4	9	0.25	5	0.08
SC190EUM-1	25	34 000	2.3	6	1.4	7	4	9	0.25	5	0.08
SC190EUM-2	25	34 000	5.5	16	3.6	18	4	9	0.25	5	0.08
SC190EUM-3	25	34 000	14	41	9	45	4	9	0.25	5	0.08
SC190EUM-4	25	34 000	34	91	23	102	4	9	0.25	5	0.08
SC300EUM-0	33	45 000	—	—	0.7	4	5	10	0.1	5	0.11
SC300EUM-1	33	45 000	2.3	7	1.4	8	5	10	0.1	5	0.11
SC300EUM-2	33	45 000	7	23	4.5	27	5	10	0.1	5	0.11
SC300EUM-3	33	45 000	23	68	14	82	5	10	0.1	5	0.11
SC300EUM-4	33	45 000	68	181	32	204	5	10	0.1	5	0.11
SC650EUM-0	73	68 000	—	—	2.3	14	11	32	0.2	5	0.31
SC650EUM-1	73	68 000	11	36	8	45	11	32	0.2	5	0.31
SC650EUM-2	73	68 000	34	113	23	136	11	32	0.2	5	0.31
SC650EUM-3	73	68 000	109	363	68	408	11	32	0.2	5	0.31
SC650EUM-4	73	68 000	363	1 089	204	1 180	11	32	0.2	5	0.31
SC925EUM-0	110	90 000	8	25	4.5	29	11	32	0.4	5	0.39
SC925EUM-1	110	90 000	22	72	14	90	11	32	0.4	5	0.39
SC925EUM-2	110	90 000	59	208	40	272	11	32	0.4	5	0.39
SC925EUM-3	110	90 000	181	612	113	726	11	32	0.4	5	0.39
SC925EUM-4	110	90 000	544	1 952	340	2 088	11	32	0.4	5	0.39

1 For applications with higher side load angles consider using the side load adaptor (BV) pages 35 to 38.